

Commercial Door Operator

The Door Operator Specialists

Advanced Trolley System
Light-Duty Trolley Operator

Model ATS 211X

1 YEAR WARRANTY

**NEW X-tended
travel for 14' doors**



Security+® anti-burglary coding
radio receiver, standard

automatic safety reverse/automatic door stop

maximum run timer

heavy-duty "I-beam" configured trolley track

auto-reconnect trolley

meets current requirements for both
commercial and residential door operators

**residential/commercial
operator**

Advanced Trolley System for use on
standard lift sectional doors up to 14'
high, rated for 8 cycles per hour. The
ATS meets all current federal and state
laws and UL325 safety standards for
residential and commercial applications.



CHAMBERLAIN®

LiftMaster®

Compliments of Garage Door Corp, Skokie, IL www.gdcorp.com N/NW Chicago & suburban IL Lift-Master dealer

PROFESSIONAL

standard features

The ATS meets all current federal and state laws and UL325 safety standards for residential and commercial applications:



automatic safety reverse/automatic door stop

Reverses door automatically if obstructed when going down, stops if obstructed when going up.


The Protector System®

Projects an invisible light beam across garage door opening. If anything interrupts the beam while the door is closing, door automatically reverses before making contact. If beam is obstructed, door will not close.



manual release with auto-reconnect trolley

Manual release in case of power failure. When power is restored, a push of the button automatically reconnects the door and operator.



push button station

Momentary contact to open and close.



14' center support bracket

Standard with 14' rail. Optional on all other door sizes. Provides additional rail support on 14' doors.



"I-beam" trolley track

Industrial-strength heavy-duty steel "I-beam" configuration for increased rigidity for 8', 10', 12' and 14' door heights. Full #48 chain drive.



motor

High-torque, industrial, 1/2 HP, 115V, single-phase motor with instant reverse and automatic reset thermal overload.




ROLLING CODE TECHNOLOGY

The ATS is equipped with a Security+® Rolling Code Receiver:

With every activation, Security+® transmits a brand-new code, one of over 100-billion codes, never to be repeated. The ATS Security+® operator can accommodate up to 8 Security+® remote controls as well as 1 Security+® Keyless Entry System. Ideal for multiple drivers. (Remote controls are not included.)

LiftMaster offers optional Remote Controls and a Keyless Entry System with Security+® Anti-Burglary Coding.

clearance and mounting details

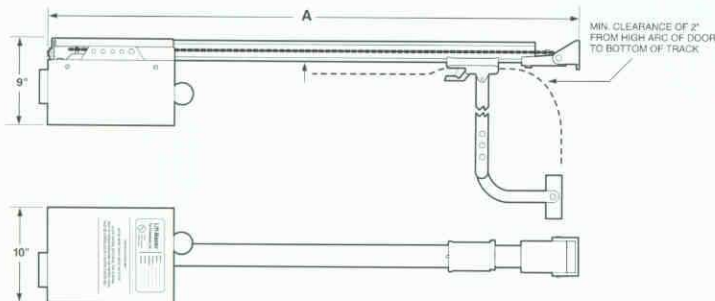

MAXIMUM DOOR AREA (SQ. FT.)

STANDARD SECTIONAL	MAXIMUM DOOR AREA (SQ. FT.)				
	24 ga. Steel	22 ga. Steel	20 ga. Steel	16 ga. Steel	—
Fiberglass	Alum. Doors	Wood Doors	—	—	—
—	—	24 ga. Steel Insul.	20 ga. Steel Insul.	16 ga. Steel Insul.	—
SQ. FT.	250	210	180	120	80

NOTE: On steel insulated doors, a 24 ga. back panel is assumed.

Door Height	8'	10'	12'	14'
A - Dimension	Door Height + 3'-3"	Door Height + 3'-3"	Door Height + 3'-9"	Door Height + 3'-9"

CHAMBERLAIN®
LiftMaster®
PROFESSIONAL

THE CHAMBERLAIN GROUP, INC.
845 Larch Avenue • Elmhurst, IL 60126

World's Largest Manufacturer of Garage Door Openers
www.liftmaster.com

Garage Door Corporation
Paris Service & Electronics
www.gdcorp.com
4646 W Oakton (rear), Skokie
(847) 329-8300 Skokie (call for hours)
(847) 823-8300 Park Ridge

www.gdcorp.com

© 2003, LM CDO ATS Spec '03

The Chamberlain Group, Inc.

Printed in U.S.A.

Chamberlain reserves the right to make design or specification changes without notice.

LMCDOATS